


◀80X80X38mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

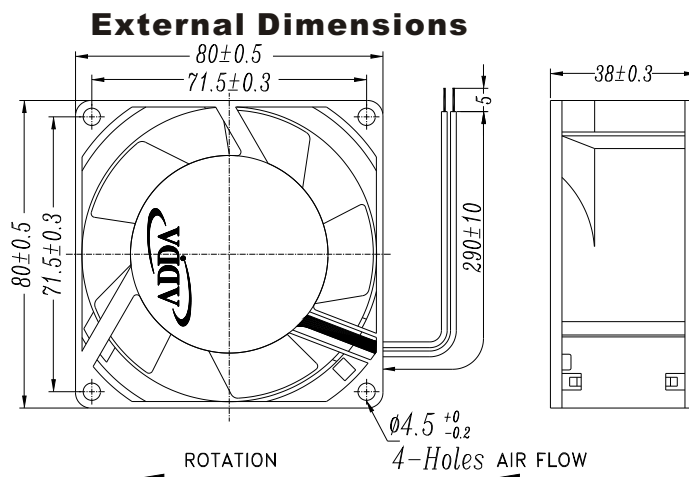



Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1430AWG22
OPERATING TEMP*:-10C~70C
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Volt./Freq (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
80x80x38	AA8381HB-AW		115/50	0.13	8.98	2300	0.679	24.0	0.112	2.812	25.3	320
			115/60	0.10	6.75	2800	0.854	30.1	0.170	4.255	31.6	
	AA8381MS-AT		115/50	0.08	5.42	2300	0.689	24.3	0.112	2.802	25.3	
			115/60	0.07	4.61	2400	0.734	25.9	0.123	3.098	26.2	
	AA8381HX-AT		115/50	0.13	8.98	2300	0.679	24.0	0.112	2.812	25.3	
			115/60	0.10	6.75	2800	0.854	30.1	0.170	4.255	31.6	
	AA8381MX-AT		115/50	0.08	5.42	2300	0.687	24.3	0.112	2.802	25.3	
			115/60	0.07	4.61	2400	0.733	25.9	0.123	3.098	26.2	
	AA8382HS-AT		230/50	0.07	8.80	2300	0.679	24.0	0.112	2.812	25.3	
			230/60	0.06	6.80	2800	0.854	30.1	0.170	4.255	31.6	
	AA8382MS-AT		230/50	0.05	6.80	2300	0.687	24.3	0.112	2.802	25.3	
			230/60	0.05	5.70	2400	0.733	25.9	0.123	3.098	26.2	

Specifications subject to change without notice.

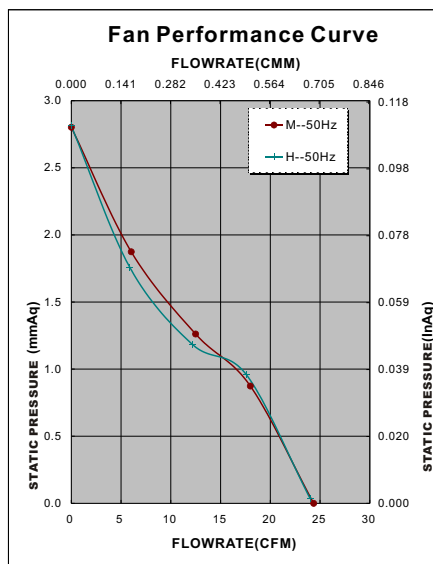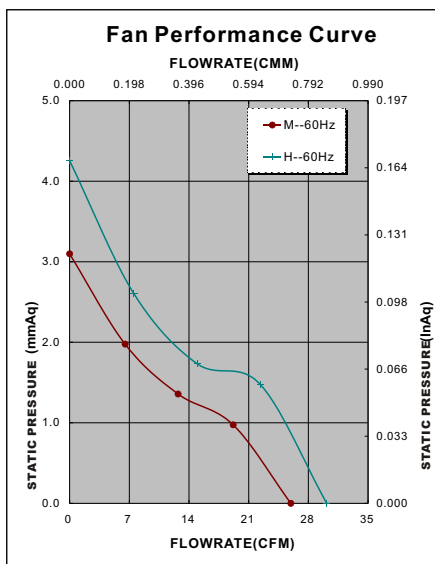

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B

*Safety approvals

✓	✓		✓	✓	

