


◀92X92X25mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

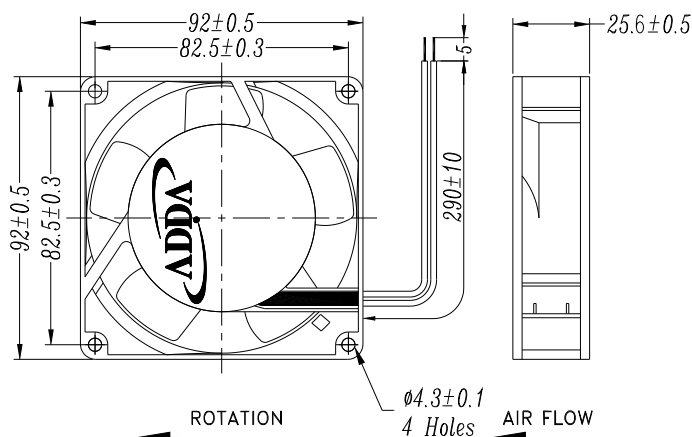



Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1430AWG22
OPERATING TEMP*:-10C~70C
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Volt./Freq (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
92x92x25	AA9251MB-AT		115/50	0.15	17.30	1900	0.780	27.5	0.064	1.613	21.1	230
			115/60	0.13	14.90	2150	0.894	31.6	0.078	1.955	26.8	
	AA9252MB-AT		230/50	0.07	16.10	1900	0.780	27.5	0.064	1.613	21.1	
			230/60	0.06	13.80	2150	0.894	31.6	0.078	1.955	26.8	

Specifications subject to change without notice.

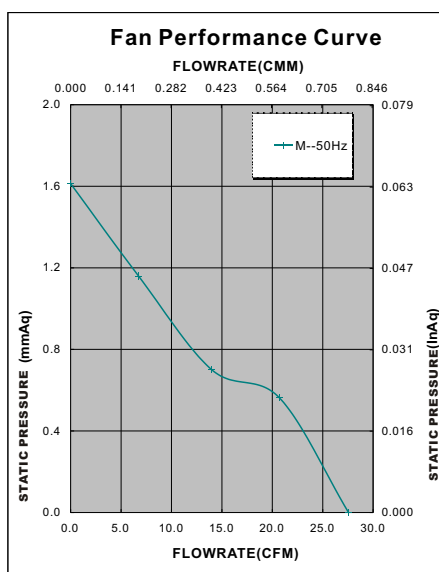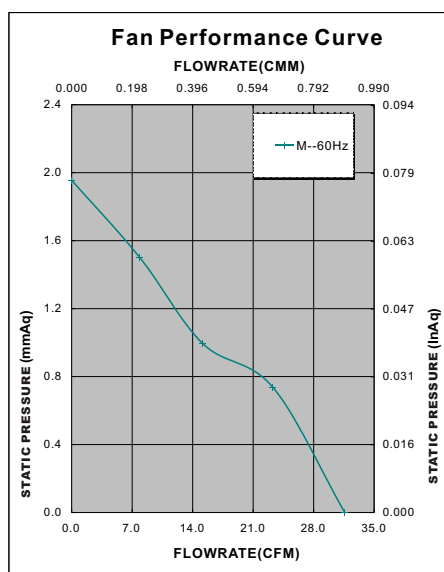

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B

*Safety approvals

UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®

