


◀120X120X25mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

External Dimensions

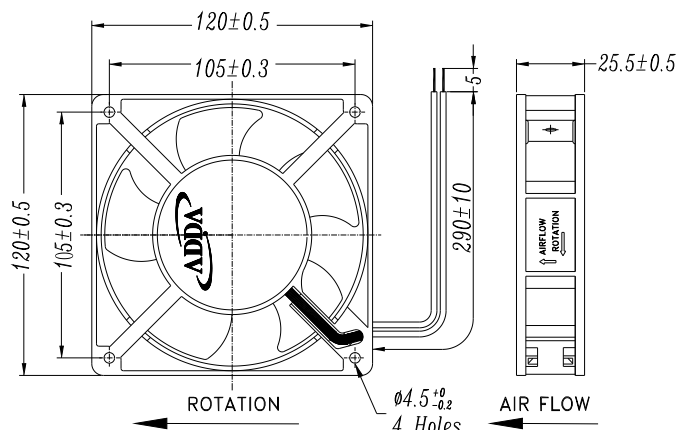



Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1430AWG22
OPERATING TEMP*:-10C~70C
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Volt./Freq (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
120x120x25	AA1251MB-AT		115/50	0.22	23.00	2050	1.727	61.0	0.140	3.508	38.7	340
			115/60	0.19	19.60	2400	2.040	72.0	0.140	3.508	44.1	
	AA1252MB-AT		230/50	0.11	20.70	2050	1.727	61.0	0.140	3.508	38.7	
			230/60	0.10	18.40	2400	2.040	72.0	0.140	3.508	44.1	

Specifications subject to change without notice.

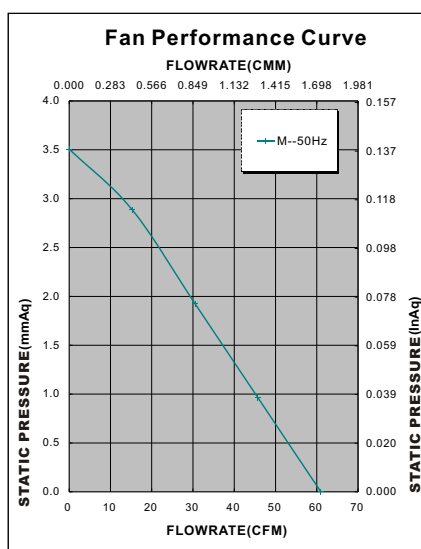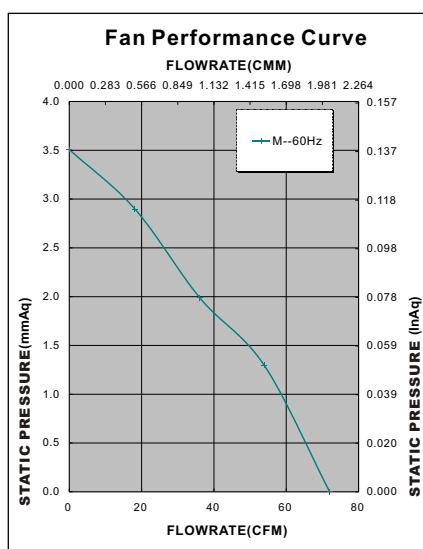

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B

*Safety approvals

				✓	

