


◀40X40X10mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc,.

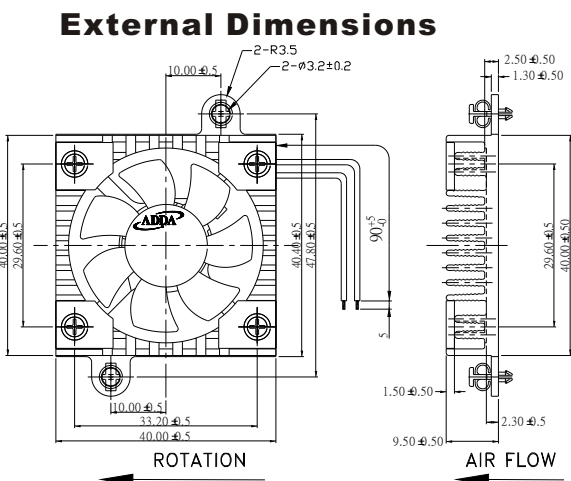

Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1571AWG28
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V,12V
*:-10C~60C for fans with sleeve/ball combinationbearings.

Specifications(Nominal)

*:Noise is measured atthe distance of one(1)meter from the axisof intake.

							Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		Noise Level (dB/A)	Weight (g)
40x40x10	AP0405MX-G70		5	0.14	0.700	8000	0.133	4.70	0.111	2.78	28.0	19.2
	AP0405HX-G73		5	0.13	0.650	9000	0.139	4.90	0.150	3.75	35.0	
	AP0412LX-G70		12	0.07	0.840	6500	0.099	3.50	0.063	1.58	19.0	
	AP0412MX-G70		12	0.08	0.960	8000	0.133	4.70	0.111	2.78	28.0	
Specifications subject to change without notice.												

Specifications subject to change without notice.

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓							

*Safety approvals