


# ◀35X35X10mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

## External Dimensions

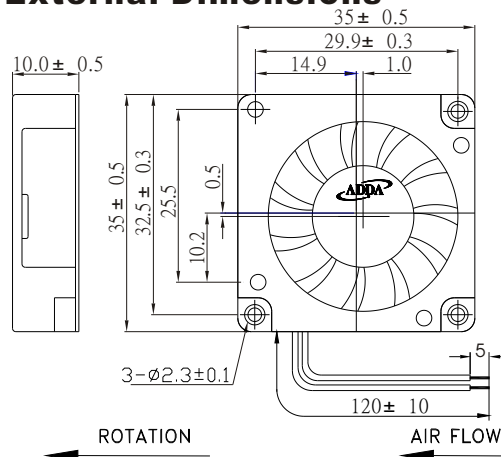


Frame:Plastic(UL:94v-0)  
Impeller:Plastic(UL:94v-0)  
Bearing:Hypro bearing  
Lead wire:UL1571AWG28  
OPERATING TEMP\*:-10C~70C  
VOLTAGE AVAILABLE:5V,12V  
\*:-10C~60C for fans with sleeve/ball combination bearings.

## Specifications(Nominal)

\*:Noise is measured at the distance of one(1) meter from the axis of intake.

							Bearing type:   =Ball   =Sleeve   =1B1S   =Hypro bearing					
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)   (CFM)		Maximum Pressure (InAq)   (mmAq)		Noise Level (dB/A)	Weight (g)
35x35x10	AB3505LB-GA0		5	0.09	0.450	5000	0.026	0.91	0.042	1.05	23.0	16
	AB3505MX-GA0		5	0.11	0.550	6000	0.035	1.22	0.153	3.84	27.5	
	AB3505HX-GA0		5	0.17	0.850	7000	0.043	1.52	0.199	4.98	30.7	
	AB3512LX-GA0		12	0.11	0.132	5000	0.026	0.91	0.042	1.05	23.0	
	AB3512MB-GA0		12	0.09	0.108	6000	0.035	1.22	0.153	3.84	27.5	
	AB3512HB-GA0		12	0.10	0.120	7000	0.043	1.52	0.199	4.98	30.7	
	AB3505LB-GA6		5	0.09	0.450	5000	0.026	0.91	0.042	1.05	23.0	
	AB3505MX-GA6		5	0.11	0.550	6000	0.035	1.22	0.153	3.84	27.5	
	AB3505HX-GA6		5	0.17	0.850	7000	0.043	1.52	0.199	4.98	30.7	
	AB3512LX-GA6		12	0.11	0.132	5000	0.026	0.91	0.042	1.05	23.0	
	AB3512MB-GA6		12	0.09	0.108	6000	0.035	1.22	0.153	3.84	27.5	
	AB3512HB-GA6		12	0.10	0.120	7000	0.043	1.52	0.199	4.98	30.7	
Specifications subject to change without notice.												

Specifications subject to change without notice.

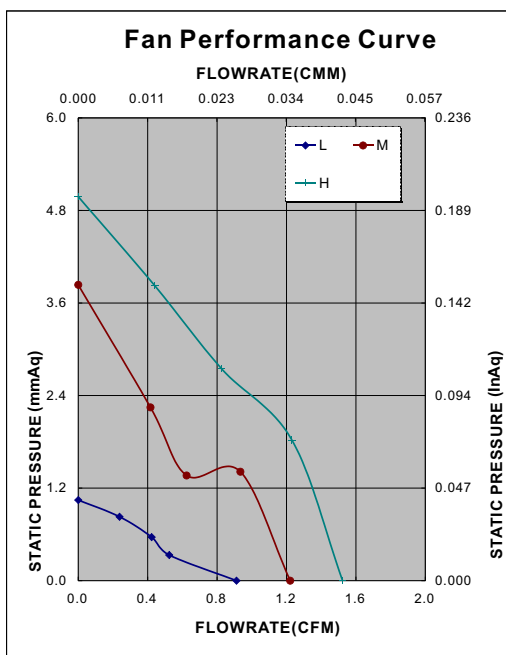

\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					✓

\*Safety approvals

UL®	UL®	SA®	UL®	CE	UL®
✓	✓		✓	✓	

