


◀70X70X12mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

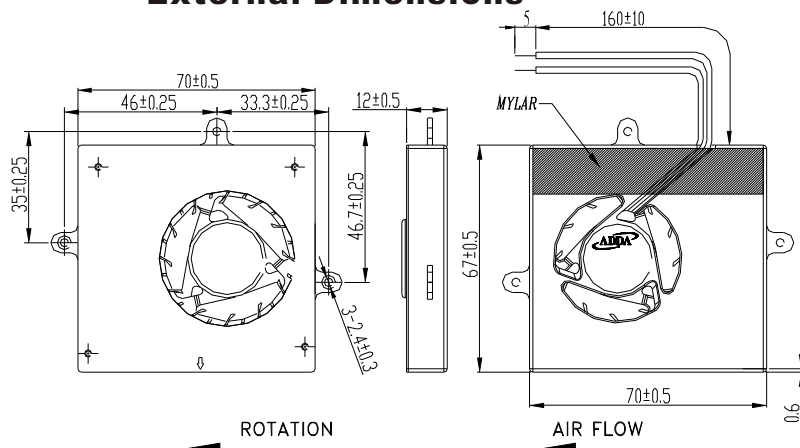

Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1571AWG28
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V
*:-10C~60C for fans with sleeve/ball combination bearings.


Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

							Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		Noise Level (dB/A)	Weight (g)
70X70X12	AB7012HB-E01		12	0.18	2.16	3800	0.183	6.48	0.419	10.48	34.0	35
	AB7012LB-E01		12	0.10	1.20	2700	0.117	4.16	0.151	3.78	20.5	
Specifications subject to change without notice.												

Specifications subject to change without notice.

Fan Performance Curve

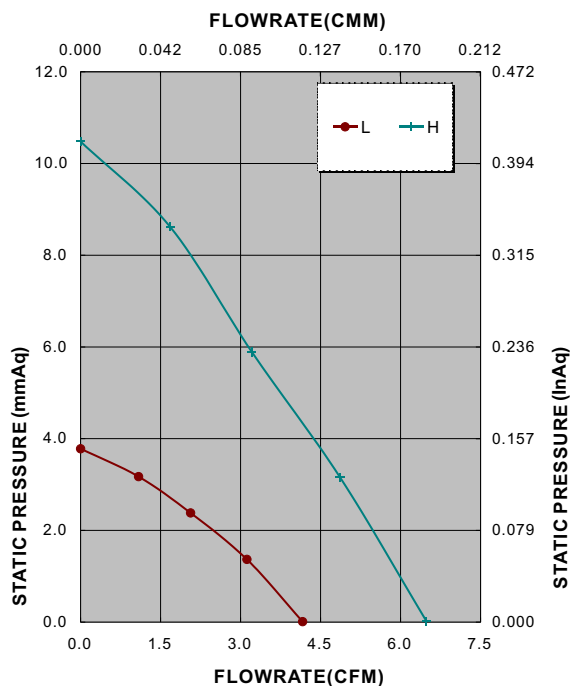

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

*Safety approvals

✓	✓		✓	✓	

