


◀ 20X20X06mm Series ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,.

External Dimensions

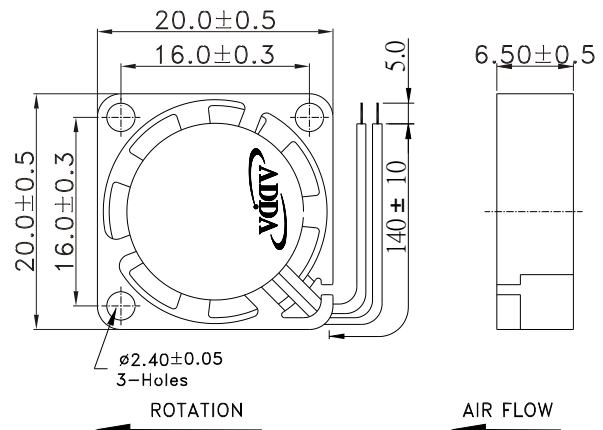


Frame: Plastic (UL: 94V-0)
Impeller: Plastic (UL: 94V-0)
Bearing: Hydro bearing
Lead wire: UL 1571 AWG28
OPERATING TEMP*: -10C~70C
VOLTAGE AVAILABLE: 5V, 12V
*: -10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*: Noise is measured at the distance of one (1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (V)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hydro bearing					Weight (g)
							Maximum AirFlow		Maximum Pressure		Noise Level	
							(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	
20x20x06	AD2005DX-K70		5	0.06	0.300	7000	0.011	0.40	0.039	0.98	12.0	4
	AD2005LX-K70		5	0.10	0.500	10500	0.017	0.58	0.077	1.92	19.5	
	AD2005MX-K70		5	0.15	0.750	14000	0.023	0.81	0.150	3.75	26.9	
	AD2005DX-K71		5	0.06	0.300	7000	0.011	0.40	0.039	0.98	12.0	
	AD2005LX-K71		5	0.05	0.250	10500	0.017	0.58	0.077	1.92	19.5	
	AD2005MX-K71		5	0.12	0.600	14000	0.023	0.81	0.150	3.75	26.9	
	AD2012LX-K70		12	0.06	0.720	10500	0.017	0.58	0.077	1.92	19.5	
	AD2012MX-K70		12	0.07	0.840	14000	0.023	0.81	0.150	3.75	26.9	
	AD2012LX-K71		12	0.06	0.720	10500	0.017	0.58	0.077	1.92	19.5	
	AD2012MX-K71		12	0.07	0.840	14000	0.023	0.81	0.150	3.75	26.9	

Specifications subject to change without notice.

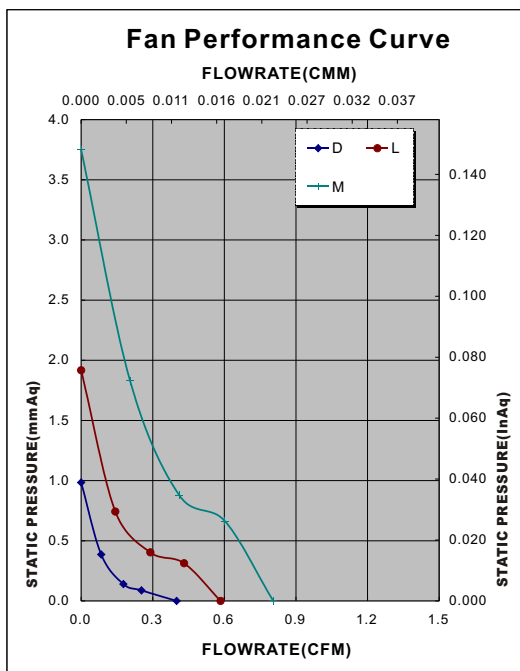

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓							✓

*Safety approvals

UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®	UL®

