


# ◀ 25X25X10mm Series ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,.

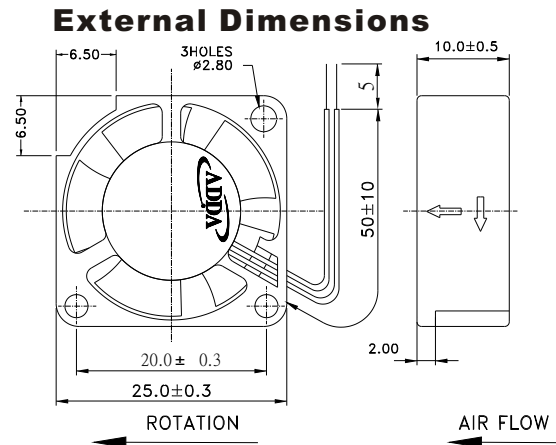


Frame: Plastic (UL: 94v-0)  
Impeller: Plastic (UL: 94v-0)  
Bearing: Hydro bearing  
Lead wire: UL 1571 AWG28  
OPERATING TEMP\*: -10C~70C  
VOLTAGE AVAILABLE: 5V, 12V  
\*: -10C~60C for fans with sleeve/ball combination bearings.

## Specifications (Nominal)

\*: Noise is measured at the distance of one (1) meter from the axis of intake.

							Bearing type:   =Ball   =Sleeve   =1B1S   =Hypro bearing					
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)   (CFM)		Maximum Pressure (InAq)   (mmAq)		Noise Level (dB/A)	Weight (g)
25x25x10	AD0205LX-G50GL		5	0.10	0.50	8000	0.051	1.80	0.116	2.90	15.6	8
	AD0205MX-G50GL		5	0.12	0.60	10000	0.062	2.20	0.170	4.25	23.1	
	AD0205HX-G50GL		5	0.18	0.90	12000	0.074	2.62	0.235	5.86	28.0	
	AD0212LX-G50GL		12	0.07	0.35	8000	0.051	1.80	0.116	2.90	15.6	
	AD0212MX-G50GL		12	0.08	0.40	10000	0.062	2.20	0.170	4.25	23.1	
	AD0212HX-G50GL		12	0.09	0.45	12000	0.074	2.62	0.235	5.86	28.0	
	AD0205LX-G51GL		5	0.10	0.50	8000	0.051	1.80	0.116	2.90	15.6	
	AD0205MX-G51GL		5	0.12	0.60	10000	0.062	2.20	0.170	4.25	23.1	
	AD0205HX-G51GL		5	0.18	0.90	12000	0.074	2.62	0.235	5.86	28.0	
	AD0212LX-G51GL		12	0.07	0.35	8000	0.051	1.80	0.116	2.90	15.6	
	AD0212MX-G51GL		12	0.08	0.40	10000	0.062	2.20	0.170	4.25	23.1	
	AD0212HX-G51GL		12	0.09	0.45	12000	0.074	2.62	0.235	5.86	28.0	
Specifications subject to change without notice.												

Specifications subject to change without notice.

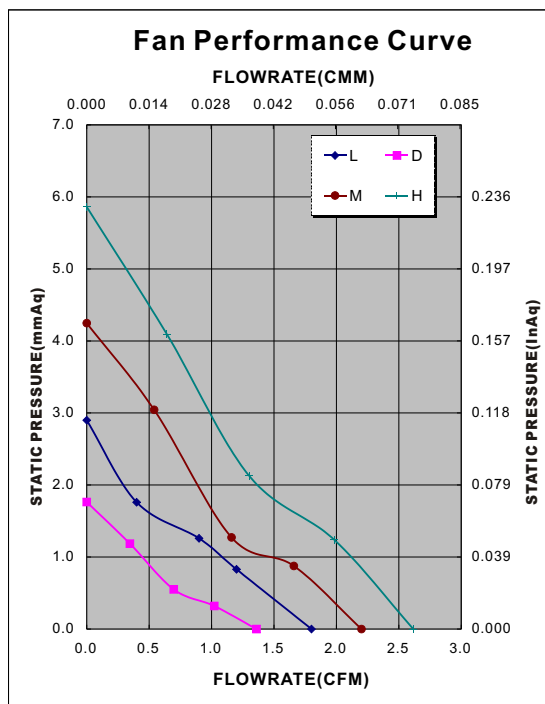

\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					✓

\*Safety approvals

UL®	cUL®	CSA®	UL ENEC	CE	CCC
✓	✓		✓	✓	

