


◀ 30X30X06mm Series ▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

External Dimensions

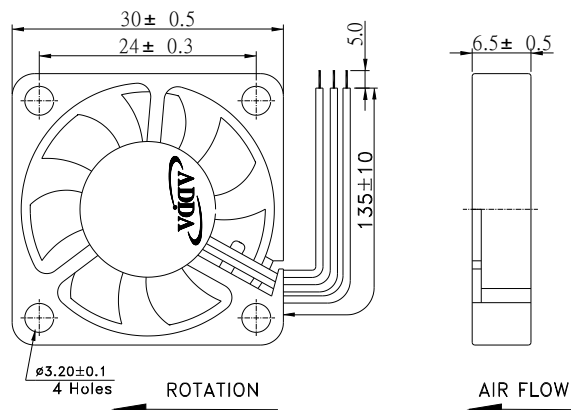


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1571AWG28
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V,12V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Notes: 1) Maximum static load capacity (C0) is based on the inner diameter.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing				Noise Level (dB/A)	Weight (g)
							Maximum AirFlow		Maximum Pressure			
							(CMM)	(CFM)	(InAq)	(mmAq)		
30x30x06	AD0305LX-K70		5	0.09	0.45	7500	0.072	2.55	0.110	2.75	20.0	6
	AD0305MX-K70		5	0.12	0.60	9000	0.087	3.08	0.137	3.44	27.9	
	AD0305HX-K70		5	0.18	0.90	10500	0.102	3.61	0.169	4.21	32.1	
	AD0312LX-K70		12	0.06	0.72	7500	0.072	2.55	0.110	2.75	20.0	
	AD0312MX-K70		12	0.10	1.20	9000	0.087	3.08	0.137	3.44	27.9	
	AD0312HX-K70		12	0.08	0.96	10500	0.102	3.61	0.169	4.21	32.1	
	AD0305LX-K71		5	0.09	0.45	7500	0.072	2.55	0.110	2.75	20.0	
	AD0305MX-K71		5	0.12	0.60	9000	0.087	3.08	0.137	3.44	27.9	
	AD0305HX-K71		5	0.18	0.90	10500	0.102	3.61	0.169	4.21	32.1	
	AD0312LX-K71		12	0.06	0.72	7500	0.072	2.55	0.110	2.75	20.0	
	AD0312MX-K71		12	0.10	1.20	9000	0.087	3.08	0.137	3.44	27.9	
	AD0312HX-K71		12	0.08	0.96	10500	0.102	3.61	0.169	4.21	32.1	
Specifications subject to change without notice.												

Specifications subject to change without notice.

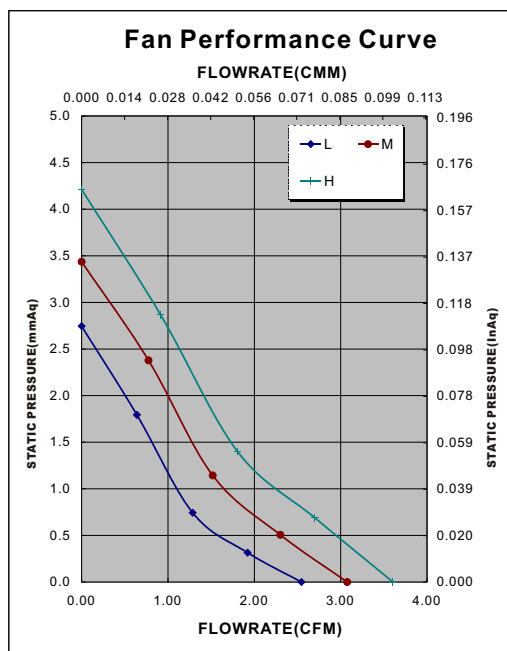

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓							✓

*Safety approvals

UL®	cUL®	SP®	SAFETY CERTIFIED TO IEC 60335-1 TYPE APPROVED	CE	CCC
✓	✓		✓	✓	

