


◀30X30X15mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

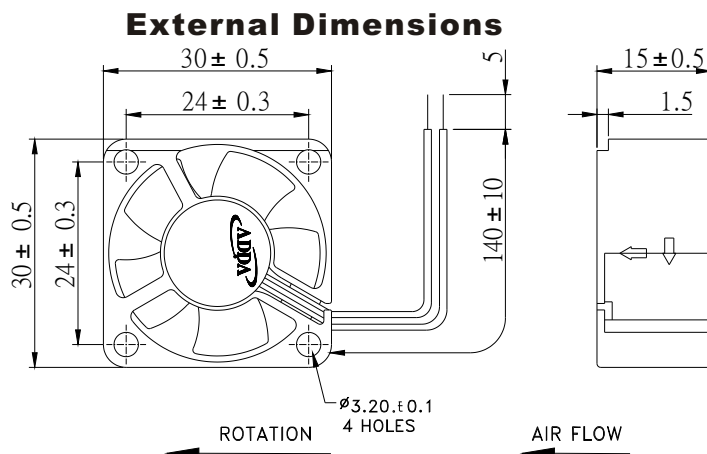


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1571AWG28
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

| Frame size (mm) | Model No. | Bearing System Type | Rated Voltage (v) | Rated Current (A) | Rated Power (W) | Rated Speed (rpm) | Bearing type: =Ball =Sleeve =1B1S =Hypro bearing | | | | Noise Level (dB/A) | Weight (g) |
|-----------------|--------------|---------------------|-------------------|-------------------|-----------------|-------------------|--|-----------------------|-------------------------|-------------------------|--------------------|------------|
| | | | | | | | Maximum AirFlow (CMM) | Maximum AirFlow (CFM) | Maximum Pressure (InAq) | Maximum Pressure (mmAq) | | |
| 30x30x15 | AD0305LB-D50 | | 5 | 0.07 | 0.35 | 4500 | 0.062 | 2.20 | 0.045 | 1.13 | 10.0 | 10 |
| | AD0305MB-D50 | | 5 | 0.10 | 0.50 | 5500 | 0.074 | 2.60 | 0.060 | 1.50 | 16.0 | |
| | AD0305HB-D50 | | 5 | 0.13 | 0.65 | 7000 | 0.105 | 3.70 | 0.110 | 2.75 | 22.5 | |
| | AD0305LB-D51 | | 5 | 0.07 | 0.35 | 4500 | 0.062 | 2.20 | 0.045 | 1.13 | 10.0 | |
| | AD0305MB-D51 | | 5 | 0.10 | 0.50 | 5500 | 0.074 | 2.60 | 0.060 | 1.50 | 16.0 | |
| | AD0305HB-D51 | | 5 | 0.13 | 0.65 | 7000 | 0.105 | 3.70 | 0.110 | 2.75 | 22.5 | |

Specifications subject to change without notice.

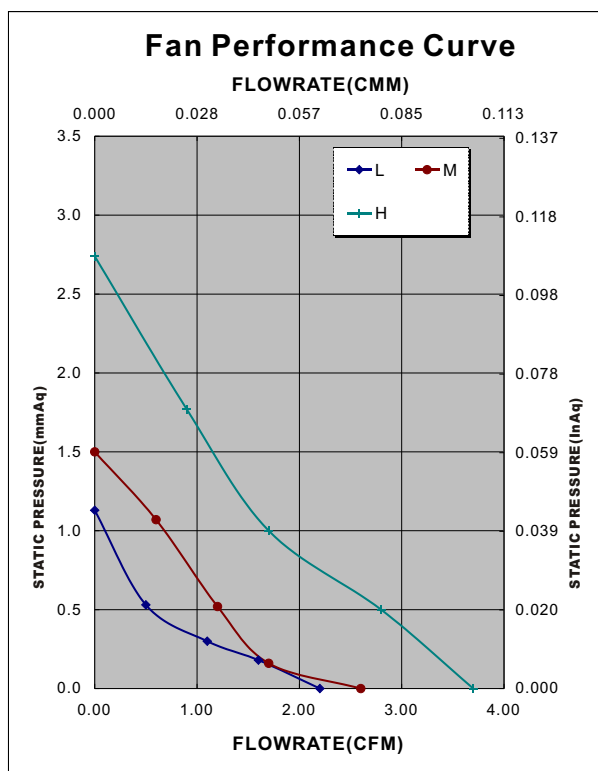

*Motor protective circuit and third lead wire functions

| 0 | 1 | 2 | 3 | 4 | 6 | 7 | 8 | 9 | A | B |
|---|---|---|---|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | | ✓ | | | | | ✓ |

*Safety approvals

| UL | UL | SA | SAFETY CERTIFIED TYPE APPROVED | CE | CCC |
|----|----|----|--------------------------------|----|-----|
| ✓ | ✓ | | ✓ | ✓ | |

