


◀60X60X10mm(11) Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

External Dimensions

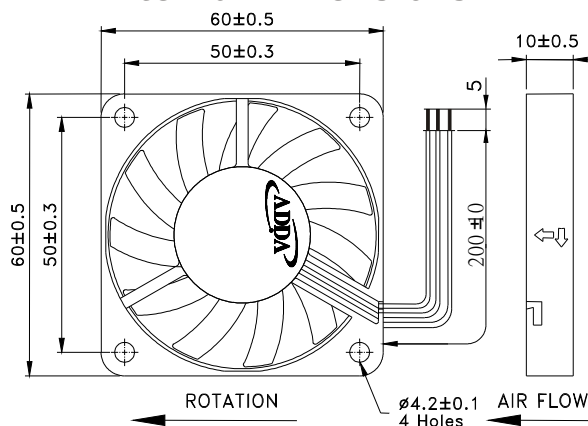


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL2468AWG26
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V,12V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
60X60X10	AD0605LB-GA0(GL)		5	0.28	1.40	3400	0.398	14.13	0.072	1.79	26.5	30
	AD0612LB-GA0(GL)		12	0.12	1.44	3400	0.398	14.13	0.072	1.79	26.5	
	AD0612MB-GA0(GL)		12	0.19	2.28	4000	0.430	15.28	0.087	2.18	30.0	
	AD0612HB-GA0(GL)		12	0.25	3.00	4600	0.518	18.39	0.119	2.98	33.8	

Specifications subject to change without notice.

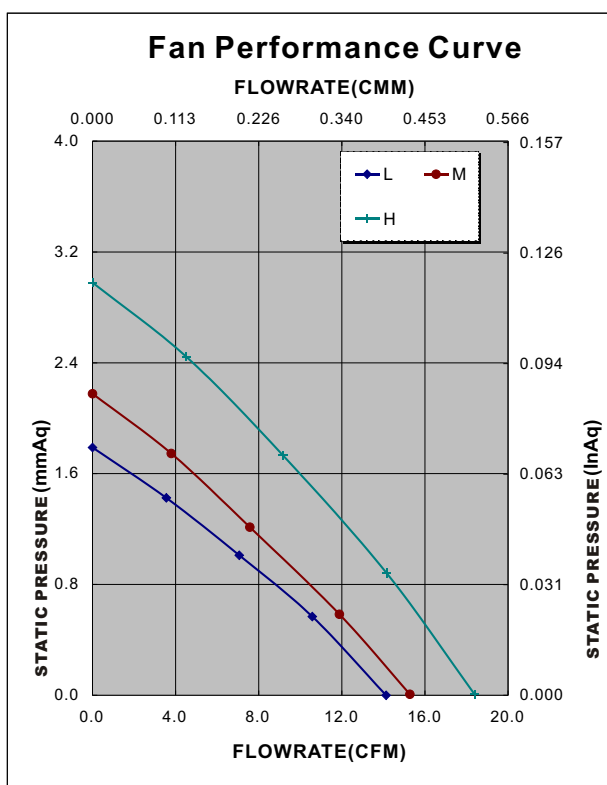

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

UL®	UL®	SP®	SAFETY APPROVED	CE	✓
✓	✓		✓	✓	✓

