


◀60X60X15mm-7(T) Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

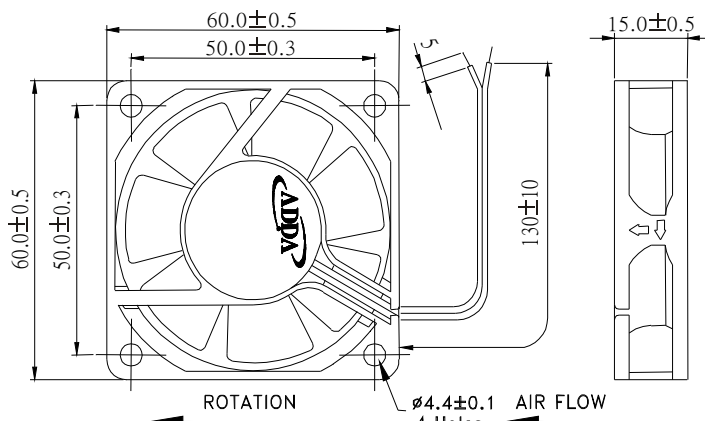


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL2468AWG26
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V,12V,24V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					Weight (g)
							Maximum AirFlow		Maximum Pressure		Noise Level	
							(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	
60X60X15	AD0605LB-D70GL(T)		5	0.2	1.00	3500	0.355	12.62	0.093	2.33	25.3	38
	AD0605MB-D70GL(T)		5	0.23	1.15	3900	0.397	14.08	0.105	2.62	31.2	
	AD0605HB-D70GL(T)		5	0.25	1.25	4500	0.446	15.82	0.149	3.72	33.4	
	AD0612DB-D70G(T)		12	0.07	0.84	3100	0.305	10.82	0.070	1.74	23.8	
	AD0612LB-D70GL(T)		12	0.09	1.08	3500	0.355	12.62	0.093	2.33	25.3	
	AD0612MB-D70GL(T)		12	0.11	1.32	3900	0.397	14.08	0.105	2.62	31.2	
	AD0612HB-D70GL(T)		12	0.13	1.56	4500	0.446	15.82	0.149	3.72	33.4	
	AD0612UB-D70GL(T)		12	0.15	1.80	5100	0.509	18.08	0.168	4.20	38.5	
	AD0624HB-D70GL(T)		24	0.09	2.16	4500	0.446	15.82	0.149	3.72	33.4	
Specifications subject to change without notice												

Specifications subject to change without notice.

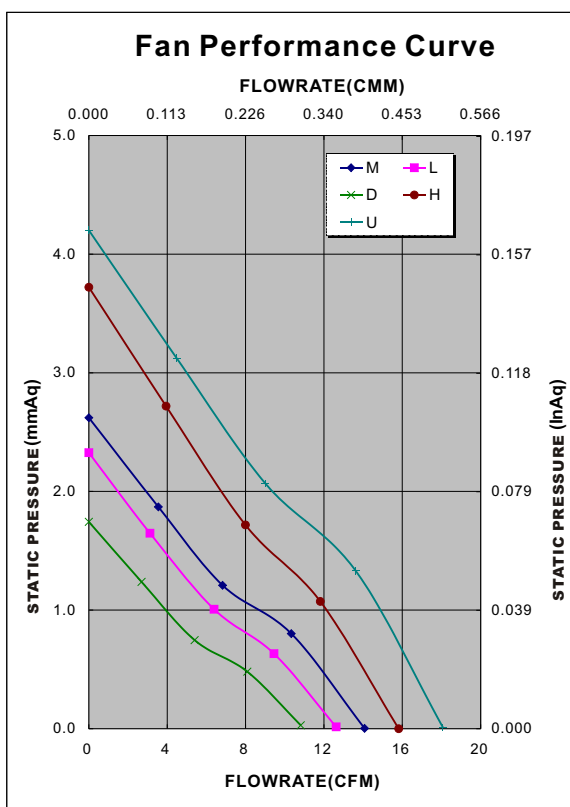

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

UL®	UL®	SP®	ISO 9001	CE	CCC
✓	✓		✓	✓	✓

