


◀60X60X15mm(7) Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

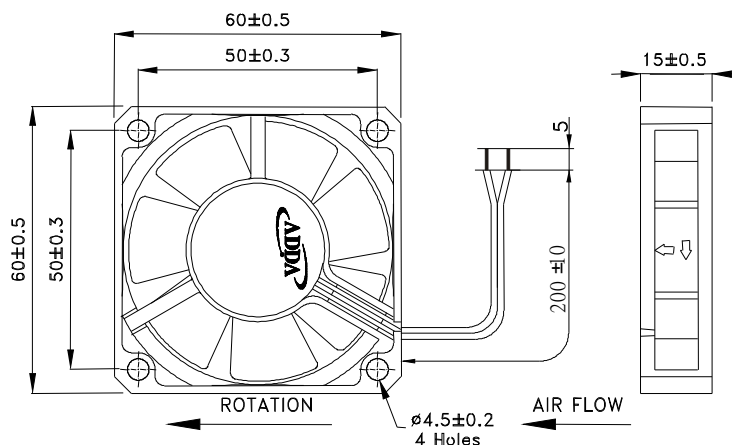


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL2468AWG26
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V,12V,24V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Noise is measured at the distance of one (1) meter from the motor intake.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing				Noise Level (dB/A)	Weight (g)
							Maximum AirFlow (CMM)		Maximum Pressure (InAq)	(mmAq)		
60X60X15	AD0605LB-D70GL		5	0.2	1.00	3500	0.355	12.62	0.093	2.33	25.3	38
	AD0605LB-D71GL		5	0.2	1.00	3500	0.355	12.62	0.093	2.33	25.3	
	AD0605MB-D70GL		5	0.23	1.15	3900	0.397	14.08	0.105	2.62	31.2	
	AD0605MB-D71GL		5	0.25	1.25	3900	0.397	14.08	0.105	2.62	31.2	
	AD0605HB-D70GL		5	0.25	1.25	4500	0.446	15.82	0.149	3.72	33.4	
	AD0605HB-D71GL		5	0.37	1.85	4500	0.446	15.82	0.149	3.72	33.4	
	AD0612DB-D70GL		12	0.07	0.84	3100	0.305	10.82	0.070	1.74	23.8	
	AD0612DB-D71GL		12	0.07	0.84	3100	0.305	10.82	0.070	1.74	23.8	
	AD0612LB-D70GL		12	0.09	1.08	3500	0.355	12.62	0.093	2.33	25.3	
	AD0612LB-D71GL		12	0.09	1.08	3500	0.355	12.62	0.093	2.33	25.3	
	AD0612MB-D70GL		12	0.11	1.32	3900	0.397	14.08	0.105	2.62	31.2	
	AD0612MB-D71GL		12	0.11	1.32	3900	0.397	14.08	0.105	2.62	31.2	
	AD0612HB-D70GL		12	0.13	1.56	4500	0.446	15.82	0.149	3.72	33.4	
	AD0612HB-D71GL		12	0.13	1.56	4500	0.446	15.82	0.149	3.72	33.4	
	AD0612UB-D70GL		12	0.15	1.80	5100	0.509	18.08	0.168	4.20	38.5	
	AD0612UB-D71GL		12	0.16	1.92	5100	0.509	18.08	0.168	4.20	38.5	
	AD0624LB-D70GL		24	0.05	1.20	3500	0.355	12.62	0.093	2.33	25.3	
	AD0624MB-D70GL		24	0.07	1.68	3900	0.397	14.08	0.105	2.62	31.2	
	AD0624HB-D70GL		24	0.09	2.16	4500	0.446	15.82	0.093	2.33	33.4	
	AD0624HB-D71GL		24	0.09	2.16	4500	0.446	15.82	0.093	2.33	33.4	
Specifications subject to change without notice.												

Specifications subject to change without notice.

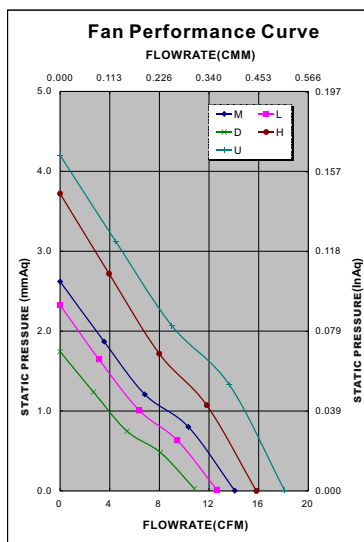

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓	✓	✓		✓			

*Safety approvals

UL	CE	RoHS	CCC	UL	UL
✓	✓		✓	✓	✓

