


◀60X60X15mm-9(T)Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

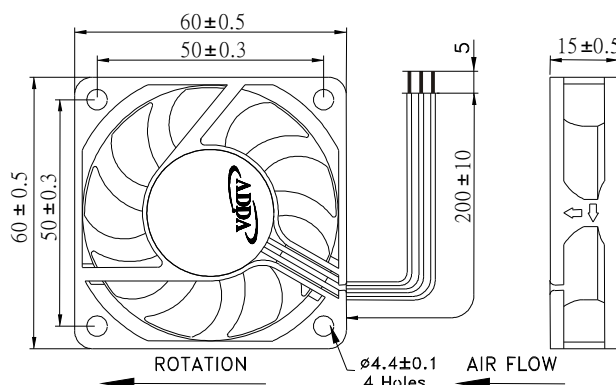


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1007AWG26
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Noise is measured at the distance of 0.67 (1) meter from the axial intake.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing				Weight (g)	
							Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)		Noise Level (dB/A)
60X60X15	AD0612MB-D91		12	0.15	1.80	3900	0.524	18.61	0.104	2.60	30.2	38
	AD0612MB-D90(T)		12	0.15	1.80	3900	0.524	18.61	0.104	2.60	30.2	
	AD0612HB-D91		12	0.18	2.16	4500	0.626	22.24	0.134	3.36	32.7	
	AD0612HB-D90(T)		12	0.18	2.16	4500	0.626	22.24	0.134	3.36	32.7	
Specifications subject to change without notice.												

Specifications subject to change without notice.

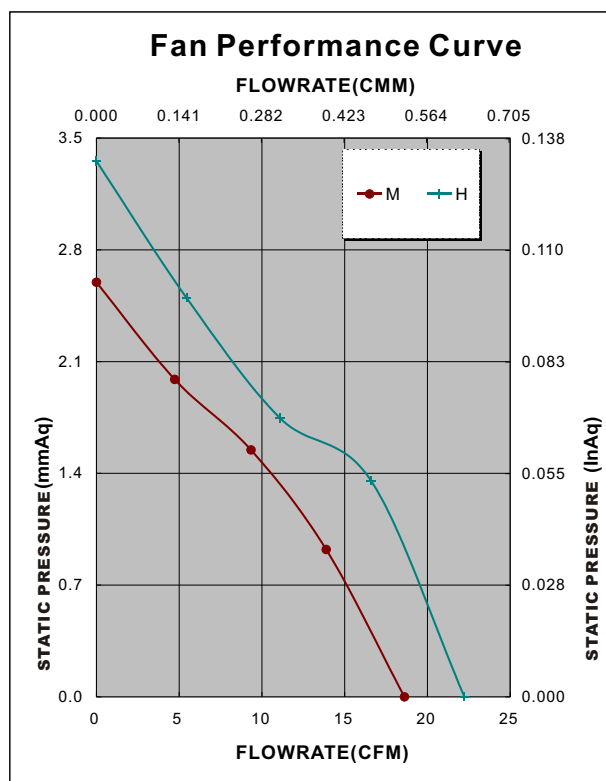

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓	✓	✓		✓			

*Safety approvals

✓	✓		✓	✓	✓	✓	✓	✓	✓	✓

