


◀70X70X15mm(11) Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

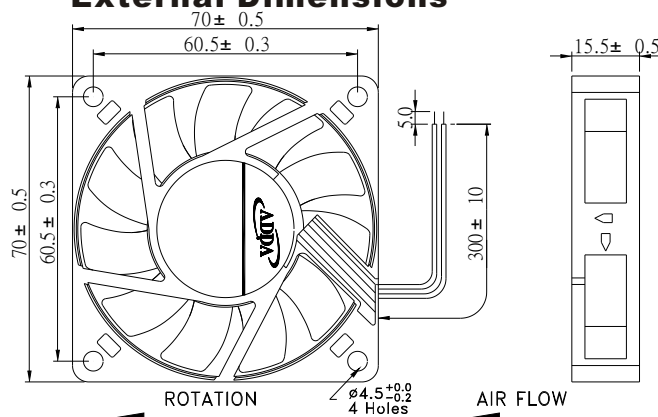


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

							Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		Noise Level (dB/A)	Weight (g)
70X70X15	AD0712UB-DA0(T)		12	0.30	3.60	4500	0.994	34.80	0.193	4.90	43.4	54
	AD0712HB-DA0(T)		12	0.25	3.00	4000	0.837	29.30	0.175	4.45	39.0	
	AD0712MB-DA0(T)		12	0.14	1.68	3500	0.717	25.10	0.122	3.10	35.3	
	AD0712LB-DA0(T)		12	0.12	1.44	3000	0.614	21.50	0.092	2.34	32.7	
	AD0712DB-DA0(T)		12	0.09	1.08	2500	0.533	18.83	0.074	1.85	28.7	
Specifications subject to change without notice.												

Specifications subject to change without notice.

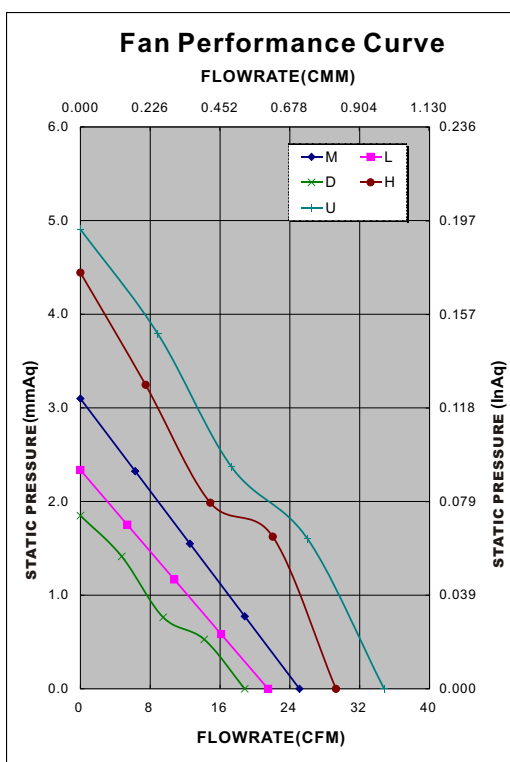

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

UL®	cUL®	SP®	SAFETY APPROVED	CE	CCC
✓	✓		✓	✓	✓

