


◀80X80X15mm(T) Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

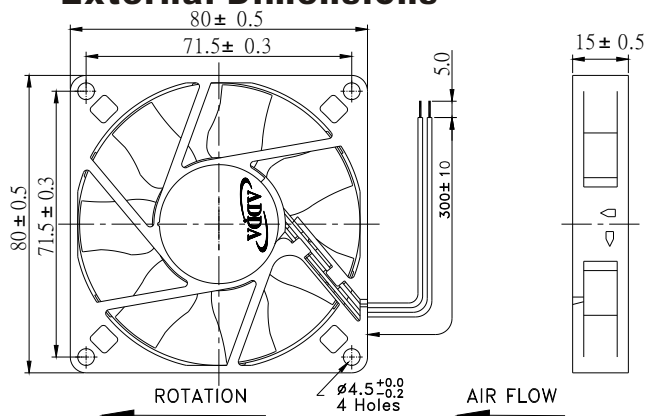


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V,24V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

Notes: 1. Maximum static load is 100 kg (220 lbs) for 1B1S and 1B1S bearing. 2. Maximum dynamic load is 100 kg (220 lbs) for 1B1S and 1B1S bearing.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing		Maximum AirFlow (CMM)	Maximum Pressure (mmAq)	Noise Level (dB/A)	Weight (g)
80X80X15	AD0812HB-D70(T)		12	0.18	2.16	3200	0.852	30.26	0.125	3.12	33.4	63
	AD0812MB-D70(T)		12	0.12	1.44	2440	0.651	23.11	0.072	1.80	26.0	
	AD0812LB-D70(T)		12	0.09	1.08	2000	0.563	20.00	0.051	1.27	19.6	
	AD0824HB-D70(T)		24	0.10	2.40	3200	0.852	30.26	0.125	3.12	33.6	
	AD0824MB-D70(T)		24	0.08	1.92	2440	0.651	23.11	0.072	1.80	26.0	
Specifications subject to change without notice.												

Specifications subject to change without notice.

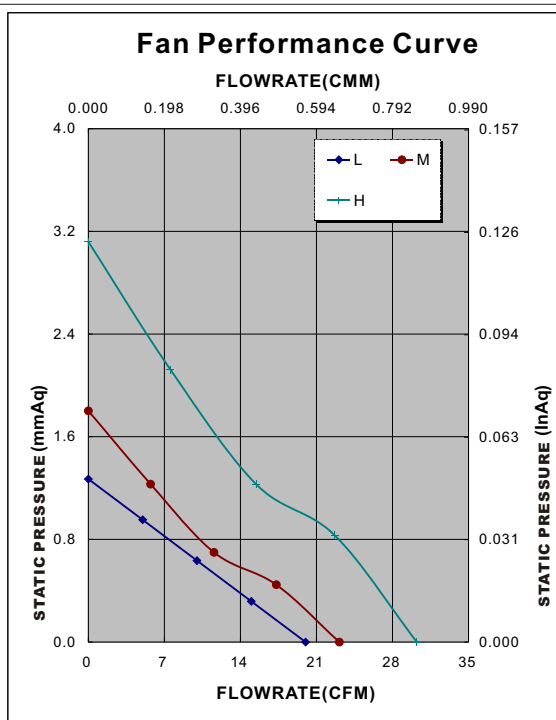

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

✓	✓							✓	✓	

