


◀ 92X92X20mm(T) Series ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,

External Dimensions

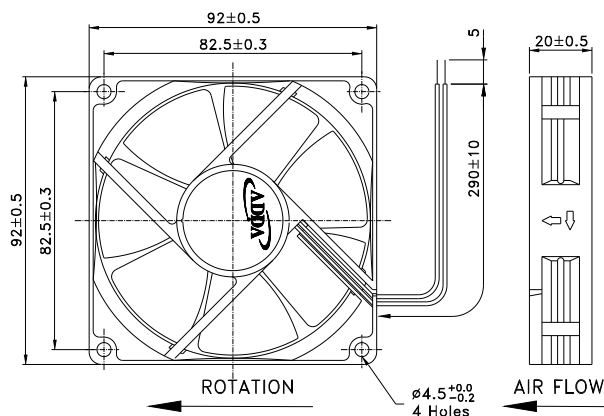


Frame: Plastic (UL: 94V-0)
Impeller: Plastic (UL: 94V-0)
Bearing: Hydro bearing
Lead wire: UL 1007AWG24
OPERATING TEMP*: -10C~70C
VOLTAGE AVAILABLE: 12V, 24V
*: -10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*: Noise is measured at the distance of one (1) meter from the axis of intake.

Notes: 1. Maximum rated load is based on the bearing type and the shaft diameter.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing				Noise Level (dB/A)	Weight (g)
							Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)			
92X92X20	AD0912HB-C70(T)		12	0.25	3.00	2700	0.890	31.61	0.125	3.12	36.1	85
	AD0912MB-C70(T)		12	0.16	1.92	2500	0.825	29.30	0.107	2.67	34.2	
	AD0912HB-C76(T)		12	0.25	3.00	2700	0.890	31.61	0.125	3.12	36.1	
	AD0912MB-C76(T)		12	0.16	1.92	2500	0.825	29.30	0.107	2.67	34.2	
	AD0924HB-C70(T)		24	0.14	3.36	2700	0.890	31.61	0.125	3.12	36.1	
	AD0924HB-C76(T)		24	0.14	3.36	2700	0.890	31.61	0.125	3.12	36.1	
Specifications subject to change without notice.												

Specifications subject to change without notice.

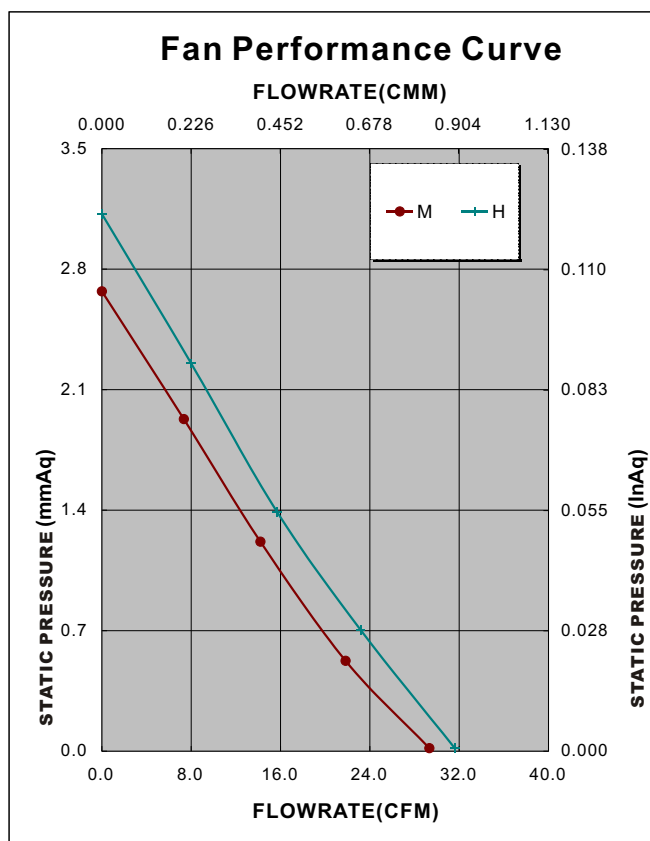

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					

*Safety approvals

UL®	cUL®	SP®	100% RECYCLED PLASTIC	SAFETY APPROVED	CE	RoHS
✓	✓	✓	✓	✓	✓	

