


# ◀92X92X25mm(T) Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

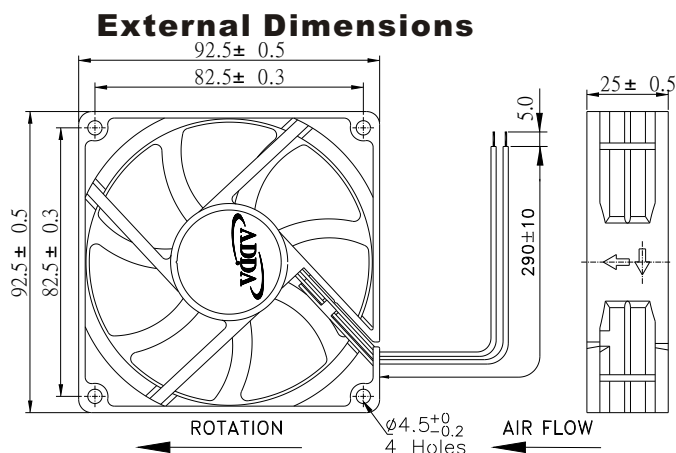


Frame:Plastic(UL:94v-0)  
Impeller:Plastic(UL:94v-0)  
Bearing:Hypro bearing  
Lead wire:UL1007AWG24  
OPERATING TEMP\*:-10C~70C  
VOLTAGE AVAILABLE:24V  
\*:-10C~60C for fans with sleeve/ball combination bearings.

## Specifications(Nominal)

\*:Noise is measured at the distance of one(1) meter from the axis of intake.

							Bearing type:   =Ball   =Sleeve   =1B1S   =Hypro bearing					
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	Noise Level (dB/A)	Weight (g)
92X92X25	AD0912UB-A70GL(T)		12	0.30	3.60	3300	1.595	56.62	0.175	4.38	39.4	101
	AD0912HB-A70GL(T)		12	0.25	3.00	2900	1.389	49.30	0.120	2.99	35.0	
	AD0912MB-A70GL(T)		12	0.17	2.04	2400	1.169	41.49	0.090	2.25	31.3	
	AD0912LB-A70GL(T)		12	0.13	1.56	2050	0.979	34.75	0.066	1.65	25.0	
	AD0912DB-A70GL(T)		12	0.09	1.08	1600	0.753	26.72	0.044	1.09	18.0	
	AD0924HB-A70GL(T)		24	0.15	3.60	2900	1.389	49.30	0.120	2.99	35.0	
	AD0924MB-A70GL(T)		24	0.12	2.88	2400	1.169	41.49	0.090	2.25	31.0	
	AD0924LB-A70GL(T)		24	0.08	1.92	2050	0.979	34.75	0.066	1.65	26.5	
Specifications subject to change without notice.												



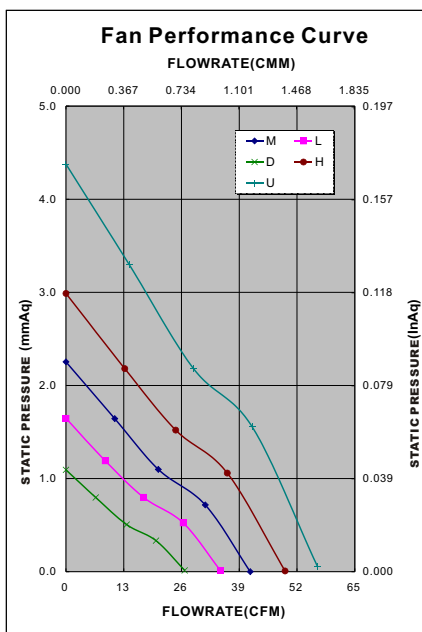



Specifications subject to change without notice.



\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

\*Safety approvals

					
✓	✓		✓	✓	

