


◀92X92X32mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

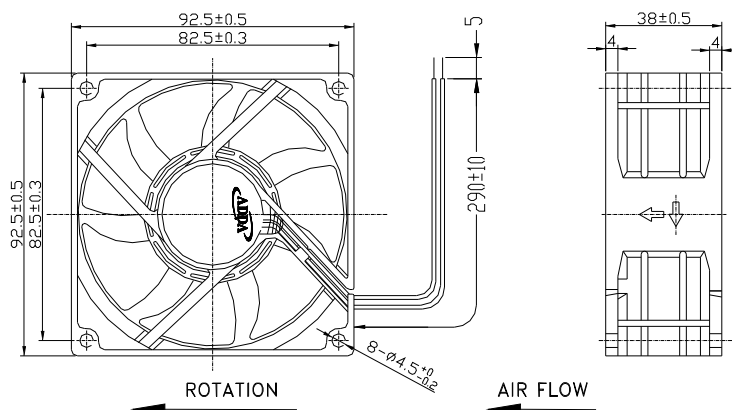


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V,48V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					Weight (g)
							Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	
							(CMM)	(CFM)	(InAq)	(mmAq)		
92X92X32	AD0912UB-Y71		12	0.50	6.00	3900	2.174	76.10	0.340	8.64	47.2	141
	AD0912HB-Y71		12	0.37	4.44	3500	2.000	70.00	0.280	7.11	44.0	
	AD0912MB-Y71		12	0.29	3.48	3000	1.640	57.40	0.210	5.33	40.8	
	AD0912LB-Y71		12	0.19	2.28	2500	1.363	47.70	0.150	3.81	34.6	
	AD0948UB-Y71		48	0.18	8.64	3900	2.174	76.10	0.340	8.64	47.2	
	AD0948HB-Y71		48	0.14	6.72	3500	2.000	70.00	0.280	7.11	44.0	
	AD0948MB-Y71		48	0.10	4.80	3000	1.640	57.40	0.210	5.33	40.8	
	AD0948LB-Y71		48	0.08	3.84	2500	1.363	47.70	0.150	3.81	34.6	
Specifications subject to change without notice.												

Specifications subject to change without notice.

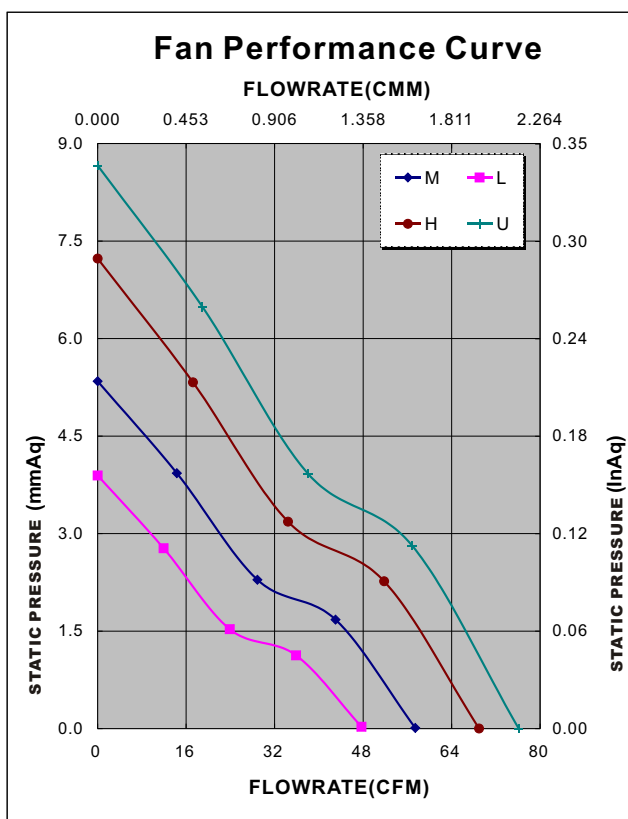

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

*Safety approvals

UL®	cUL®	SP®	100% RECYCLED PLASTIC	SAFETY APPROVED	CE	✓

