


◀ 92X92X38mm Series ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,.

External Dimensions

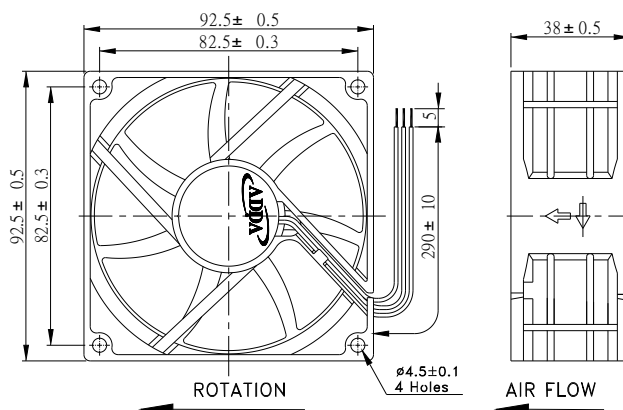


Frame: Plastic(UL:94v-0)
Impeller: Plastic(UL:94v-0)
Bearing: Ball bearing
Lead wire: UL1007AWG24
OPERATING TEMP*: -10C~70C
VOLTAGE AVAILABLE: 12V
*: -10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*: Noise is measured at the distance of one(1) meter from the axis of intake.

Notes: 1) Maximum and minimum values of the (g) motor with the motor frame.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					Weight (g)
							Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	Noise Level (dB/A)	
92X92X38	AD0912HB-F73		12	0.7	8.40	4000	2.525	88.40	0.279	7.09	45.8	123
	AD0912MB-F73		12	0.42	5.04	3300	2.048	71.70	0.199	5.06	41.8	
Specifications subject to change without notice.												

Specifications subject to change without notice.

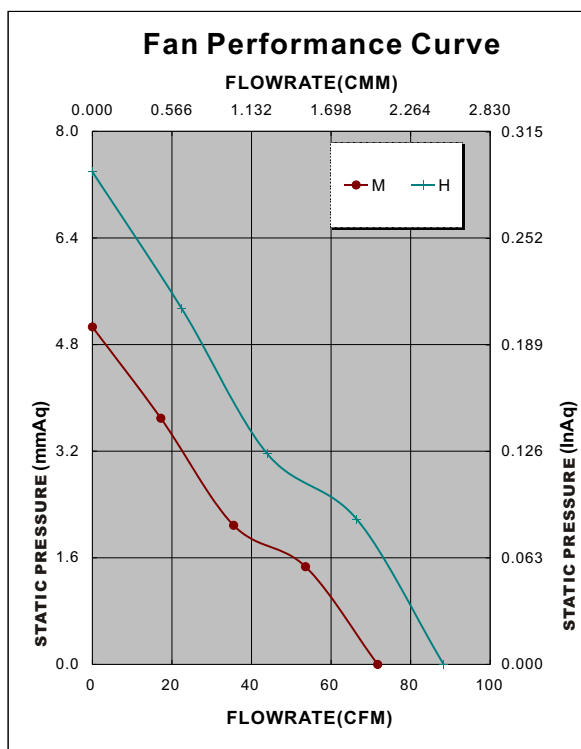

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

*Safety approvals

				✓	

