


◀60X60X25mmSeries▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

External Dimensions

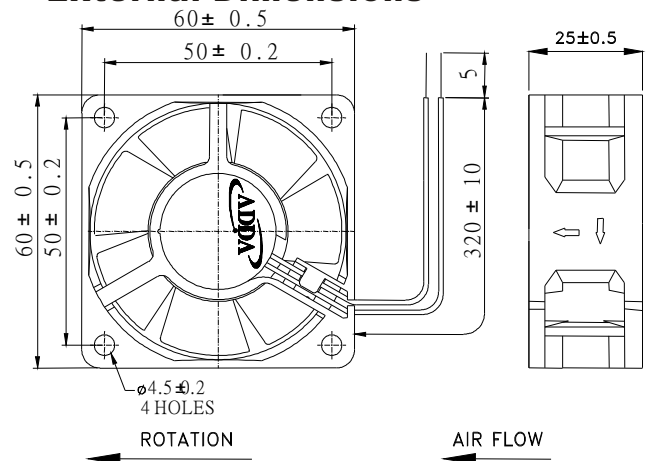


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

| Frame size (mm) | Model No. | Bearing System Type | Rated Voltage (v) | Rated Current (A) | Rated Power (W) | Rated Speed (rpm) | Maximum AirFlow | | Maximum Pressure | | Noise Level (dB/A) | Weight (g) |
|-----------------|-------------------|---------------------|-------------------|-------------------|-----------------|-------------------|-----------------|-------|------------------|--------|--------------------|------------|
| | | | | | | | (CMM) | (CFM) | (InAq) | (mmAq) | | |
| 60X60X25 | AQ0612HB-A70GL(T) | | 12 | 0.23 | 2.76 | 4500 | 0.679 | 23.98 | 0.175 | 4.45 | 33.9 | 58 |
| | AQ0612MB-A70GL(T) | | 12 | 0.14 | 1.68 | 3500 | 0.508 | 17.95 | 0.106 | 2.69 | 27.1 | |
| | AQ0612LB-A70GL(T) | | 12 | 0.08 | 0.96 | 2500 | 0.358 | 12.65 | 0.054 | 1.38 | 18.1 | |

Specifications subject to change without notice.

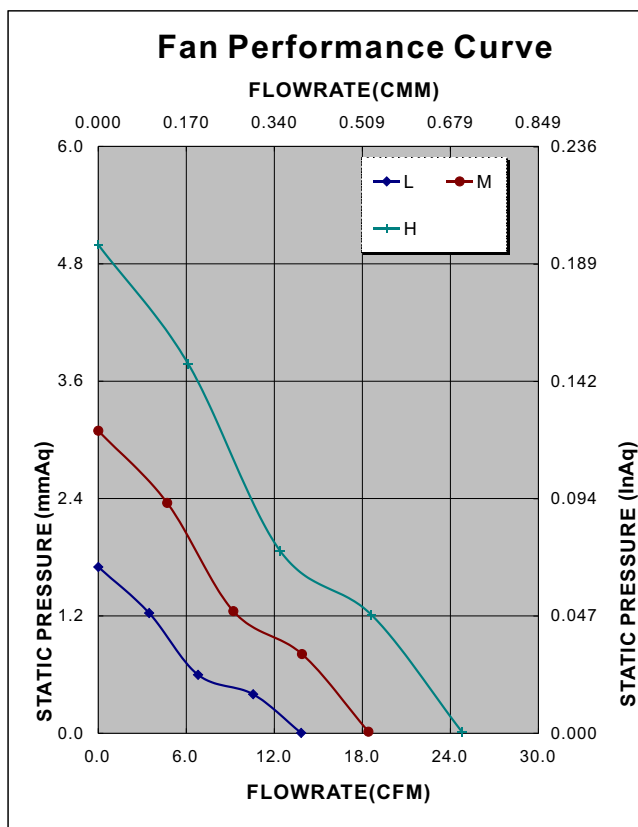

*Motor protective circuit and third lead wire functions

| 0 | 1 | 2 | 3 | 4 | 6 | 7 | 8 | 9 | A | B |
|---|---|---|---|---|---|---|---|---|---|---|
| ✓ | | | | | ✓ | | | | | |

*Safety approvals

| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |
| | | | | | | | | | | |

