


◀80X80X25mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

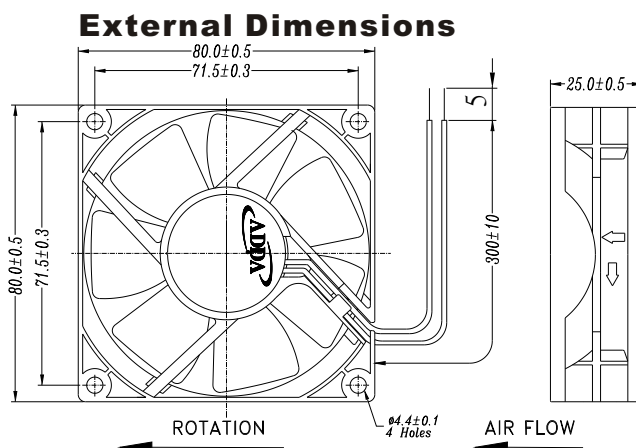


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Ball bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V,24V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1)meter from the axis of intake.

Notes: 1. Maximum static load limit of 100kg. 2. Motor must be used in vertical position.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing					Weight (g)
							Maximum AirFlow (CMM)	(CFM)	Maximum Pressure (InAq)	(mmAq)	Noise Level (dB/A)	
80X80X25	AQ0812HB-A70GL(T)		12	0.25	3.00	3100	1.104	39.00	0.150	3.75	34.4	82
	AQ0812MB-A70GL(T)		12	0.15	1.80	2500	0.874	30.87	0.101	2.53	28.3	
	AQ0812LB-A70GL(T)		12	0.12	1.44	2100	0.740	26.16	0.072	1.79	22.5	
	AQ0812DB-A70GL(T)		12	0.09	1.08	1600	0.542	19.15	0.044	1.10	15.0	
	AQ0824MB-A70GL(T)		24	0.10	2.40	2500	0.874	30.87	0.101	2.53	28.3	
	AQ0824LB-A70GL(T)		24	0.09	2.16	2100	0.740	26.16	0.072	1.79	22.5	
Specifications subject to change without notice.												

Specifications subject to change without notice.

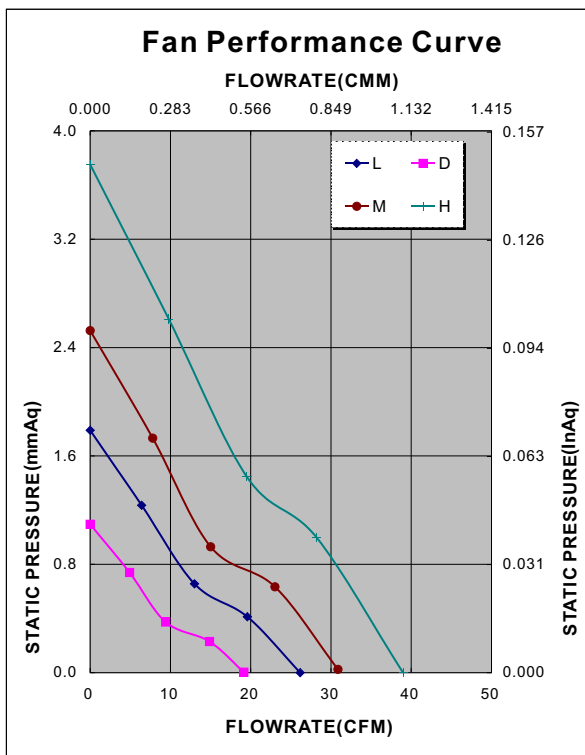

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				✓	

