


# ◀120X120X38mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

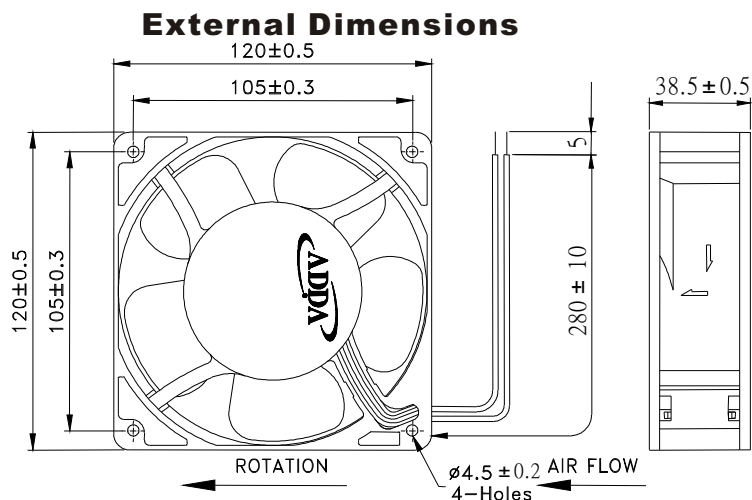


Frame:Plastic(UL:94v-0)  
Impeller:Plastic(UL:94v-0)  
Bearing:Ball bearing  
Lead wire:UL1007AWG24  
OPERATING TEMP\*:-10C~70C  
VOLTAGE AVAILABLE:12V,24V,48V  
\*:-10C~60C for fans with sleeve/ball combination bearings.

## Specifications(Nominal)

\*:Noise is measured at the distance of one(1)meter from the axis of intake.

Bearing type: =Ball =Sleeve =1B1S =Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		Noise Level (dB/A)	Weight (g)
120X120X38	AQ1212DB-F51		12	0.16	1.92	1500	1.486	52.75	0.089	2.24	27.4	297
	AQ1212LB-F51		12	0.24	2.88	1950	2.047	72.66	0.127	3.17	32.9	
	AQ1212MB-F51		12	0.35	4.20	2540	2.660	94.43	0.228	5.69	41.0	
	AQ1212HB-F51		12	0.50	6.00	2800	2.941	104.40	0.242	6.05	42.8	
	AQ1224LB-F51		24	0.14	3.36	1950	2.047	72.66	0.127	3.17	32.9	
	AQ1224MB-F51		24	0.23	5.52	2540	2.660	94.43	0.228	5.69	41.0	
	AQ1224HB-F51		24	0.32	7.68	2800	2.941	104.40	0.242	6.05	42.8	
	AQ1248DB-F51		48	0.08	3.84	1500	1.486	52.75	0.089	2.24	27.4	
	AQ1248LB-F51		48	0.10	4.80	1950	2.047	72.66	0.127	3.17	32.9	
	AQ1248MB-F51		48	0.14	6.72	2540	2.660	94.43	0.228	5.69	41.0	
AQ1248HB-F51		48	0.20	9.60	2800	2.941	104.40	0.242	6.05	42.8		
Specifications subject to change without notice												

Specifications subject to change without notice.

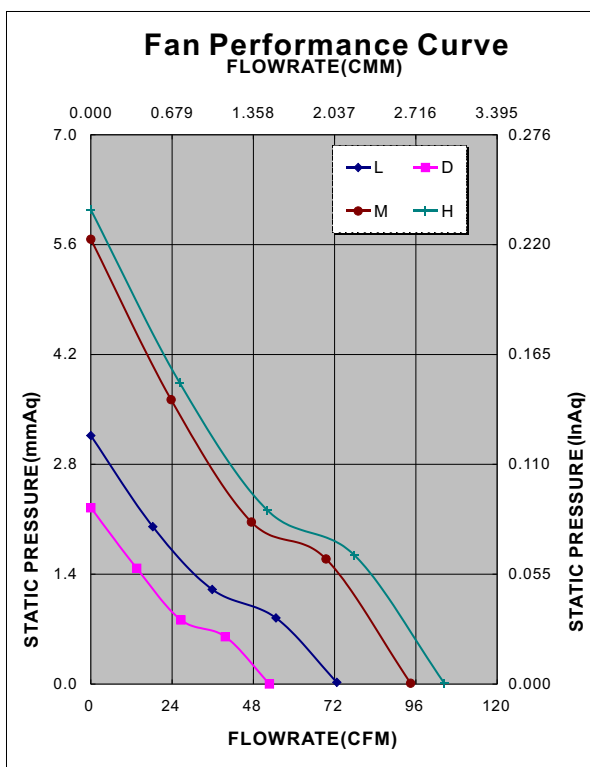

\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

\*Safety approvals

				✓	

